## MF700

# Configurable Mifare® (MAD) Sector Reader

#### Introduction:

MF700 is an user configurable Mifare® sector data reader. It can be configured to read Mifare® card with MAD1/MAD2 standard in a Mifare® application open system, or can be configured to read the user-defined sector data (Non-MAD) in a user defined closed system. Output interface can be configured as an RS232 output,or Wiegand output or MSR ABA TK2.

MF700 also can be set with a Reader ID number for multi-unit communication.

#### Features:

- Possible to be installed on metal surface
- Supports MAD1/MAD2 standard and customer MAD-AID setting
- Supports Non-MAD format with user-defined sector number.
- Supports Multi Sectors
- Reads Mifare® Standard 4K or Mifare® Standard 1K card
- Sets Reader ID number for multi-link application
- Three output interfaces: Wiegand (Default), RS232 and MSR ABA TK2
- Wiegand output is selectable from 26 bits to 128 bits
- RS232 output packet can be set with Header, Reader ID and trailer
- Internal LED and buzzer are configurable
- Weather resistant
- Also available with stylish wood housing
- $\divideontimes$  Mifare is a registered trademark of Philips Electronics N.V.

## **Applications:**

- Access Control System
- Time attendance
- Guest registration system
- Academic service
- Information service


**Specifications:** 

opecifications.	
Power Requirements	<ul><li>7.5 ~ 12 Volts</li><li>※ A linear regulator is recommended</li></ul>
Interface	Wiegand 26 bits ~ 128bits Selectable RS232, MSR ABA TK2
Card type	Mifare MF1 standard cards for 1024 / 4096 bytes
Maximum reading distance	Up to 50 mm with <b>MFA01</b> card in ideal conditions
Frequency	13.56 MHz standard
Card format	MAD1 / MAD2
Audio / Visual Indication	Internal LED and Buzzer
Dimensions	83(L) x 47 (W) x 16(D) mm
Housing material	ABS
Environment	Operating temperature 0 °C ~ +60 °C
	Operating relative humidity 10~90%

### Ordering information:

MF700SK: MF700 reader + MF700KIT configure kit + PCR310U card issuer + Card issue and utility software + 9VDC power adaptor + MFA01 Mifare standard 1K card \* 3 pcs MF700: MF700 reader

Specification is subject to change without notice.

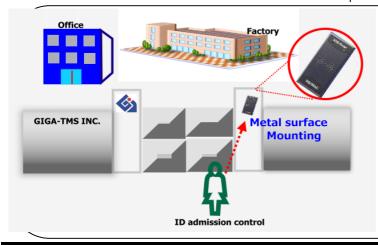



Wood housing design. Ava

Available here

We welcome OEM inquiries

- ♦ Custom design manufacturing is available
- ♦ Custom device programming is available
- ♦ Call factory for other configuration



8F.,NO.31, LANE 169, KANG-NING STREET,HSI-CHIH,TAIPEI,TAIWAN TEL: 886-2-26954214 FAX: 886-2-26954213

e-mail: promag@ms24.hinet.net gigatms@ms3.hinet.net

http://www.gigatms.com.tw

-10